


Support Note – Factory Default 645M-4

Factory Reset of the modem can be performed one of three ways..

1. From the web page (see below).

This button resets all configurations to factory default. After clicking the “Reset” button, a message will appear prompting you to confirm. By clicking “OK”, the router will reset to factory default and the system will restart.

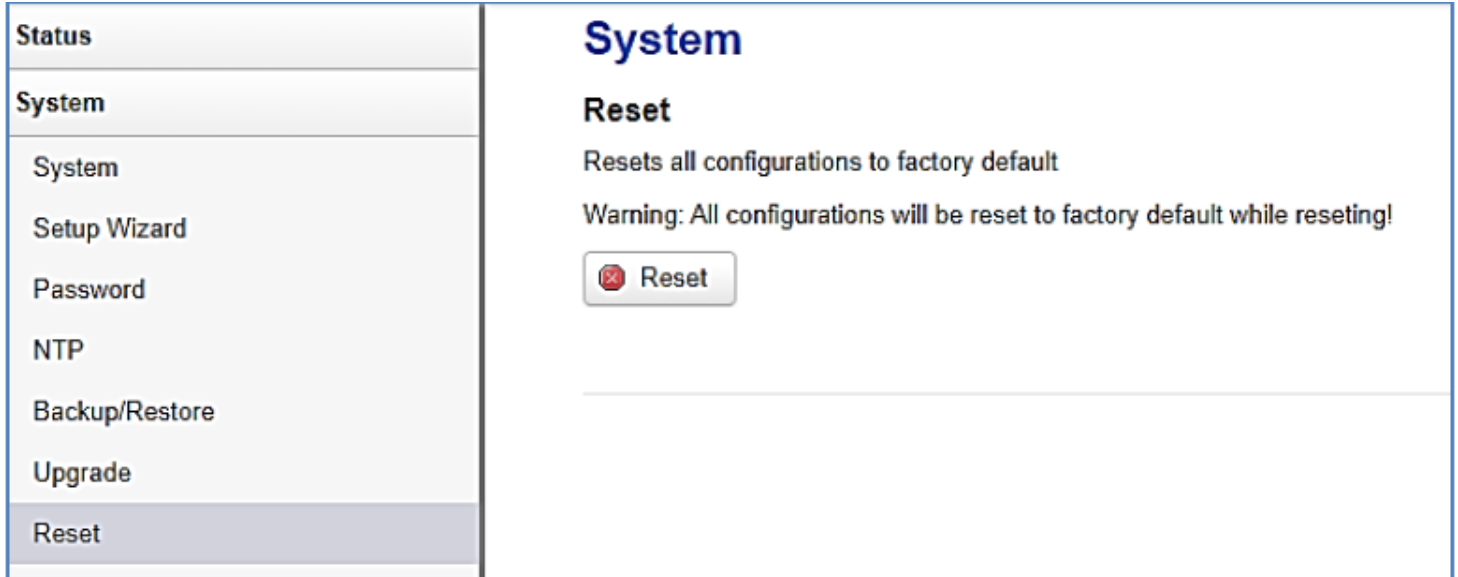

2. The Reset Pin on the terminal strip. Short the RST and GND terminals for 3 seconds and the modem will restore to factory defaults. Holding for 1 second will reboot the modem.
3. Hold in the “RST” button, just below “CELL 1” on the Antenna end of the modem for approx. 5 seconds. Note: There is no immediate indication that the reset has been performed. Release the button and after about 5 seconds you will see all the Led’s go OFF then the WAN & LAN will come ON briefly then go OFF. The LAN will come ON and flicker with traffic, the SYS led will come ON for approx. 25 seconds then start to flash and the Wi-Fi LED will come on. This is good indication that the modem has reset as the Wi-Fi is enabled by default.

Amendment Register:

Issue No.	Date	Details of Amendment
1.0	18/02/21	Draft Issue